

08-15-00

DIVISION-CONTINUATION PROGRAM APPLICATION TRANSMITTAL FORM

Docket Number	Anticipated classification of this application Class Subclass	Prior Application Examiner Art Unit
IMM-00607/03		S. Ip 2837

To the Commissioner of Patents and Trademarks:

This is a request for filing a ☒ continuation ☐ divisional application under 37 CFR 1.53(b), of pending prior application Serial No. 09/333,613, filed on June 15, 1999 of Charles J. Jacobus et al for FORCE FEEDBACK SYSTEM.

1. ☒ Enclosed is a copy of the latest inventor signed prior application, including the oath or declaration as originally filed. I hereby verify that the attached papers are a true copy of the latest inventor signed prior application Serial No. 08/543,606 as originally filed on October 16, 1995, and further that all statements made herein of his own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issuing thereon.

2. ☒ The filing fee is calculated below:

For	Number Filed	Number Extra	Rate	Fee
Total Claims	18 - 20 =	0	\$18	\$0
Independent Claims	4 - 3 =	1	\$78	\$78
Multiple dependent claim(s), if any				-0-
		Basic Fee		\$690
		Total Filing Fee		\$768

3. ☒ The filing fee of \$768 is attached.

4. ☒ The Commissioner is hereby authorized to charge any excess that may be necessary to Deposit Account No. 07-1180. A duplicate copy of this sheet is enclosed.

5. ☐ Cancel in this application original claims ____ of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)

6. ☒ Amend the specification by inserting before the first line the sentence: "This is a continuation of co-pending U.S. patent application Serial No. 09/333,613, filed June 15, 1999."

7. ☐ Transfer the drawings from the pending prior application to this application and abandon said prior application as of the filing date accorded this application. A duplicate copy of this sheet is enclosed for filing in prior application file. (May only be used if signed by person authorized by §1.138 and before payment of base issue fee.)

a. ☒ New formal drawings are enclosed.

b. ☐ Priority of application Serial No. _____ filed on _____ in _____ (country) is claimed under 35 U.S.C. 119.

☐ The certified copy has been filed in prior application Serial No. _____, filed _____.

8. ☒ The prior application is assigned of record to Immersion Corporation

9. ☐ A preliminary amendment is enclosed.

10. ☐ Also enclosed _____

11. ☒ The power of attorney in the prior application is to:

John G. Posa
GIFFORD, KRASS, GROH,
ANDERSON & CITKOWSKI, P.C.
280 N. Old Woodward Ave., Suite 400
Birmingham, MI 48009
734/913-9300

- a. ☒ The power appears in the original papers in the prior application.
b. ☐ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.
c. ☒ Address all future communications to:

John G. Posa
GIFFORD, KRASS, GROH,
ANDERSON & CITKOWSKI, P.C.
280 N. Old Woodward Ave., Suite 400
Birmingham, MI 48009

August 14, 2000
(date)

(signature)

Signature is:

- ☐ inventor(s)
☐ assignee of complete interest
☒ attorney or agent of record
☐ filed under §1.34(a)

Express Mail No. EL073516121US

FORCE FEEDBACK SYSTEM

Reference to Related Applications

This is a continuation-in-part of U.S. patent application Serial No. 08/257,070, filed June 9, 1994, which is a divisional application of U.S. Patent No. 5,389,865, issued February 14, 1995.

Field of the Invention

This invention relates to a method and system for implementing a tactile virtual reality environment, and a six-axis manipulator with force feedback defining an interface device therefor.

Background of the Invention

In many applications it is desirable for a user to remotely control the operation of a slave device by means of a hand-controller -- a device which senses the movement of a handle gripped by the user's hand and generates one or more control signals which, in turn, are used in directing the actuation of the slave device. Hand controllers are commonly used in applications where the user is necessarily in a location which is remote from the slave, for example, where the slave is in a hazardous environment, such as an environment where high levels of radiation are present. Hand controllers are also well suited for teleoperation in environments where direct viewing is limited. Examples include murky underwater environments with reduced light and obstructions such as underground excavation applications. To improve the

sensitivity of the user to the slave's environment, a force-feedback system can be used to reflect the forces generated on the hand back to the user via the hand controller. For instance, if the slave unit impacts an object, the force of the impact is felt by the user's hand.

Force reflecting hand controllers for teleoperation are well known. Units which reflect the force sensed by a remote manipulator are disclosed in U.S. Patent Nos. 4,837,734 to Ichikawa et al., 4,853,874 to Iwamoto et al., 4,888,538 to Dimitrov et al., 4,893,981 and 5,018,922 to Yoshinada et al., 4,942,538 to Yuan et al., 5,004,391 to Burdea, and 5,053,975 to Tsuchihashi et al. These units use electrical force feedback, usually applied through an electric motor/gear drive, to present the forces sensed by a remote manipulator to the user.

Figure 1 summarizes the basic operation of prior art devices. The position, velocity, and/or acceleration provided on a master hand controller 10 on a handle 12 by a user (not shown) is sensed and transmitted as a command by a controller 14 to move the slave device 16. In turn, the actual position, velocity, and/or acceleration is read from the slave device 16 and is sent back by the controller 14 as a command to the master hand controller 10, providing the user with direct kinesthetic feedback from the remote device he is controlling.

To simplify control, many prior art devices are a kinematically similar replica of the remote device under control. This kinematic similarity reduces or eliminates the need for a computer controlled interface between the master hand controller unit and the remote slave device.

This kinematic similarity requires a unique hand-controller for each unique slave device. Changes made to the kinematics of the slave device require similar changes to the controller.

5 Prior force reflecting hand controller configurations have used either counter weights or active compensation to remove friction and gravity effects from the controller handle. The use of counterweights increases the mass and moment of inertia of the system which, in
10 turn, increases user reaction time due to the additional forces necessary to accelerate and decelerate the handle. Active gravity compensation increases the complexity of a system while simultaneously increasing the possibility of undesirable system instability.

15 Further, by reacting to remote forces present on a slave device, the prior art devices lack the capability of creating a three-dimensional tactile virtual reality environment whereby a user's actions and reactions are related to a simulated world such as simulations of driving
20 or flying functions, simulation of molecular force interactions, or simulations of surgical procedures. U.S. Patent No. 5,044,956 to Behensky et al. discloses a system whereby a steering wheel is used to input positions to a simulation which in turns actuates the wheel in response to
25 simulated artifacts. This system does not disclose or anticipate the simulation and coordination of the six-degrees of freedom required for the arbitrary positioning and orientation of solid objects. Similarly, prior art devices which simulate virtual reality by visual feedback
30 to a user are not capable of accepting tactile inputs and

providing tactile force feedback.

Summary Of The Invention

5 The present invention solves the problems of the prior art by providing a method and system for providing a tactile virtual reality in response to user position and orientation. The present invention further provides a universal device whose kinematics do not necessarily replicate any particular device it might control or simulate. A computer mediated control system is provided
10 which transforms forces, torques, displacements, velocities, and accelerations measured by a simulated environment and applies them to the hand controller or visa versa. The present invention can effect and control the superposition of translational displacement with force application and angular displacement with torque, thus
15 providing arbitrary, programmed application of forces, torques, and displacements to the user in any direction. This allows the device to be controlled by, and to control, external simulations or models as well as physical remote devices. The invention can also locally simulate virtual
20 force fields generated from interaction with virtual surfaces and/or boundaries, can provide software programmed position, velocity, force, and acceleration limit stops, and can dynamically shift, rotate, or scale these virtual
25 objects.

The present invention includes a manipulator for use as a user interface which has a specific joint configuration. This joint configuration yields a design which passively solves the problem of gravity compensation

by two constant force springs. Friction in the manipulator is minimized through using a highly back-drivable low gear ratio drive system and high performance brushless DC motors. A general object of the present invention is to provide a tactile virtual reality in response to a user input. According to the present invention, an electric signal is generated for each of a plurality of degrees of freedom of the user as a function of the user position and orientation in three-dimensional space. At least one virtual reality force field is generated in response to the generated signals. A fourth signal is generated for each degree of freedom as a function of the force field, and a tactile force on the user is generated for each force signal.

A further general object of the present invention is to provide a system for providing a tactile virtual reality in response to a user input. The system comprises a six-axis interface device having an actuator for each axis and a member movable by the user. The interface device is responsive to the position and orientation of the member to generate electrical signals representative of this position and orientation. Means are also provided for generating at least one virtual reality force field responsive to the electric signals. In addition, means for generating a force signal for each axis are provided as a function of the force field wherein the actuators are responsive to their respective force signals to provide a force to each axis for creating the tactile virtual reality.

A specific object of the present invention is to

provide a six-axis manipulator capable of assuming an arbitrary orientation and position in three-dimensional space for use as a user interface.

5 A further specific object of the present invention is to provide a six-axis manipulator for use as a user interface having a constant force spring for compensating for the force of gravity.

Brief Description Of The Drawings

10 FIGURE 1 presents the configuration of prior art hand controllers;

FIGURE 2 presents a block diagram representation of the virtual reality system of the present invention;

FIGURE 3 presents a flow chart representation of the method of the present invention;

15 FIGURE 4 presents a block diagram representation of the six-axis tactile virtual reality system of the present invention;

FIGURE 5a presents a front view of a six-axis embodiment of the manipulator of the present invention;

20 FIGURE 5b presents a top view of a six-axis embodiment of the manipulator of the present invention;

FIGURE 5c presents a side view of a six-axis embodiment of the manipulator of the present invention;

25 FIGURE 6a presents a top view of the X portion of the X-Y table of an embodiment of the manipulator of the present invention;

FIGURE 6b presents a side view of the X-portion of the X-Y table of an embodiment of the manipulator of the present invention;

FIGURE 7a presents a top view of the Y-stage of the manipulator of an embodiment of the present invention;

FIGURE 7b presents a side view of the Y-stage of the manipulator of an embodiment of the present invention;

5 FIGURE 8a presents the front view of the Z-stage of the manipulator of an embodiment of the present invention;

FIGURE 8b presents the top view of the Z-stage of the manipulator of an embodiment of the present invention;

10 FIGURE 8c presents the side view of the Z-stage of the manipulator of an embodiment of the present invention;

FIGURE 9a presents a top view of the off-stage of the manipulator of an embodiment of the present invention;

15 FIGURE 9b presents the front view of the offstage of the manipulator of an embodiment of the present invention;

FIGURE 10a presents a front view of the pitch-stage of the manipulator of an embodiment of the present invention;

20 FIGURE 10b presents a side view of the pitchstage of the manipulator of an embodiment of the present invention;

FIGURE 11a presents a front view of the roll-stage of the manipulator of an embodiment of the present invention;

25 FIGURE 11b presents a top view of the roll stage of the manipulator of an embodiment of the present invention;

30 FIGURE 12a presents a front view of the handle

assembly of the manipulator of an embodiment of the present invention;

FIGURE 12b presents a side view of the handle assembly of the manipulator of an embodiment of the present invention;

FIGURE 13 presents a block diagram representation of the electronics module of an embodiment of the present invention;

FIGURE 14 presents a software driver for an embodiment of the system of the present invention;

FIGURE 15a presents a graphical two-dimensional representation of a detent of one embodiment of the present invention;

FIGURE 15b presents a schematic representation of a spring system used in implementing a detent of one embodiment of the present invention; and

FIGURE 16 represents a graphical representation of three axes of coordinate transformations for one embodiment of the present invention.

Detailed Description of The Preferred Embodiment

The present invention is a system and method for presenting forces to an operator of a remote device or to a user interacting with a virtual environment in multiple axes simultaneously mediated through a computer controlled interface system. A block diagram of the system is shown in Figure 2. A user provides a position, velocity, and/or acceleration (to be referred to generally as "force") to the user interface. The user interface generates an electrical signal for each of a plurality of

degrees of freedom of the user corresponding to the motion of the user interface along, or about, the respective degree of freedom. These electrical signals are fed to a virtual reality force field generator 24 which calculates force field values for a selected force field. These force field values are fed to the force signal generator 26 which generates a force signal for each of the plurality of degrees of freedom of the user as a function of the generated force field. These motion commands are feedback to actuators of the user interface 22 which provide such force to the user interface and thus to the user in contact with the interface device. A flowchart of the method corresponding to this system is shown in Figure 3 and referred to generally by reference numeral 30.

It should be noted that there are a variety of different ways that the user interface could be accomplished. This interface could read the position of a user's hand by means of a laser tracking system and feedback forces by urging the user's hand with jets of air. The interface could consist of a pedal responding to the position and orientation of the user's foot. In the preferred embodiment however, the user's hand will grip a handle on a user interface similar to a hand controller.

Turning now to Figure 4, a six-axis tactile virtual reality system is presented. The position, velocity, and/or acceleration provided on a master hand controller 40 on handle 42 by a user (not shown) is sensed and transmitted as a command by controller 44 to the computer model or simulation 46 which implements a virtual reality force field. In turn, the force field value for

the given position, velocity, and/or acceleration is sent back to the controller 44 which generates a force command to the master hand controller 40, providing the user with direct kinesthetic feedback from the virtual environment traversed.

The invention in its preferred embodiment is applicable to controlling a virtual or simulated environment. However, the invention is also well suited to the control of a remote or physical device. Further, the present invention is suited for application to any number of axes. For instance, a single roll axis could be used to implement a force reflecting steering wheel, a pitch and roll axis could be used to implement a two axis force reflecting joystick, or an X, Y, Z, yaw, pitch, and roll axis could be used to implement an electrically actuated motion simulator. However, the preferred implementation chosen for description herein operates six-axis position, velocity and/or acceleration sensing and force effecting axes simultaneously.

Turning now to Figure 5, a six-axis embodiment of the manipulator of the present invention is shown. The manipulator, referred to generally by reference numeral 50 is, in effect, a small back drivable robot which moves in 6 degrees of freedom, 3 linear positions (x, y, z) and 3 attitudes (roll, pitch, yaw).

Figure 5a presents a front view of the manipulator, Figure 5b presents a top view of the manipulator and Figure 5c presents a side view of the manipulator. The manipulator levitates an aircraft-type sidearm-grip control stick (or handle) 52 which incorporates three queuing

buttons 54, an analog trigger 56, and a palm-actuated deadman safety switch 58.

Force-feedback can be generated on each axis by the hand controller through 6 small, brushless, DC servo motors 60. The six axis force-reflection output and six axis orientation and position control makes the manipulation and "feeling" of multidimensional virtual objects extremely easy.

The kinematic arrangement of the invention is also shown in Figure 5. The manipulator is arranged in a Cartesian coordinate system, and the degrees of freedom are denoted by an X-axis 62, a Y-axis 64, and a Z-axis 66 for translational motions, and a yaw-axis 68, a pitch-axis 70, and a roll-axis 72 for the rotational motions. The axes of these six independent degrees of freedom intersect at a single point which has been located within the handle 52 at a point which is just below where the operator's second and third finger/ knuckle rest on the handle. Locating the axes of motion in this way minimizes cross coupling between the degrees of freedom.

Referring again Figure 3, the apparatus is attached to a work surface through the baseplate 74. The first two stages mounted up from the baseplate are a simple X-Y table driven by a rack and pinion, and held in place by two parallel rails or linear ways per stage. Because these axes work parallel to gravity, no compensation is required.

Referring to Figure 6, Figure 6a presents a top view of the X portion of the X-Y table and Figure 6b presents a side view of the same. The X linear ways 80 and the X rack 82 are affixed to the baseplate 74. The X

pinion 84 engages the rack 82 and is directly coupled to the X motor 86. The motor is affixed to the X plate 88. The X plate 88 translates via recirculating ball bearings 90 along the linear way 80, and carries the plate, motor, and pinion through translation along the X-axis 62.

Y and Z translation stages are constructed in a similar fashion. Figure 7a presents a top view of the Y-stage, and Figure 7b presents a side view of the Y-stage. The Y-stage is affixed atop and carried by the X plate 88. This stage includes: the Y linear ways 100 and bearings 102, the Y rack 104, the Y pinion 106, the Y motor 108, and the Y plate 110 for translation along Y-axis 64.

Referring to Figure 8, the Z-stage is shown. Figure 8a presents the front view of the Z-stage, Figure 8b presents the top view of the Z-stage and Figure 8c presents the side view. The Z-stage is affixed atop and carried by the Y plate 110 using two Z platform supports 120. The Z-stage includes: the Z plate 122, the Z linear way 124, the Z rack 126, the Z pinion 128, the Z motor 130, the yaw plate 132, the Z bearings and the carriage 134, the Z levitating springs 136 and the spring spools 138. This axis levitates the yaw, pitch, and roll mechanisms, and the structures to which they attach. However, the Z motor and gear train themselves do not levitate thus saving additional weight. The Z stage is easily gravity compensated by two springs of sufficient length such that a given displacement is small in comparison to the length. Thus, the force applied is relatively constant with respect to displacement. The force of the springs is upward so as to compensate for the force of gravity. The spring

constants for these springs are matched to the upper stage weight.

Attached to the Z plate 122 is the yaw stage. Referring to Figure 9, the yaw stage is presented. Figure 9a presents the top view of the yaw stage and Figure 9b presents the front view of the yaw stage. The yaw stage is comprised of the yaw motor 140, which is coupled to the yaw gearbox 142 which contains a yaw spur gear 144 coupled to the yaw motor pinion 146. The output shaft 148 of gearbox 142 is affixed normal to the arm of yaw-pitch gimbal bracket 150. Because the yaw stage operates perpendicular to the Z plate and parallel to the baseplate, it does not need gravity compensation.

Referring to Figure 10, the pitch stage is shown. Figure 10a presents a front view of the pitch stage and Figure 10b presents a side view of the pitch stage. The pitch stage is comprised of the pitch motor 160, which is coupled the pitch gearbox 162 affixed to the yaw-pitch bracket 150. The pitch gearbox includes which contains a pitch spur gear 166 coupled to the pitch motor pinion 168. The output shaft of the gearbox is affixed normal to the vertical arm of the pitch-roll gimbal bracket 170. The weight of the roll axis and the pitch-roll gimbal is compensated by using a constantforce spring 172 with a spring spool 174. This does not provide perfect balance accept at the equilibrium position. However, the small centering force is easily overpowered by the pitch motor gear train and holding friction.

Referring to Figure 11, the roll stage is shown. Figure 11a presents a front view of the roll stage and

Figure 11b presents a top view of the roll 25 stage. The roll stage is comprised of the roll motor 180, which is coupled to the roll gearbox 182 affixed to the pitch-roll bracket 170. Roll gearbox contains a roll spur gear 184 coupled to the roll motor pinion 186. The output shaft of the gearbox is affixed normal to hand grip plate 188. This last stage is not compensated because the handle components are quite light and nearly balanced.

Referring to Figure 12, the handle assembly is shown. Figure 12a presents a front view of the handle assembly and Figure 12b presents a side view of the handle assembly. The handle assembly is attached to the top surface of the hand grip plate 190 is the handle or hand grip 52, anatomically formed for either right or left hand usage, depending on the application. In addition, the entire hand grip is modular and can be conformed in a variety of sizes to meet the needs of a wide range of user hands.

Included as an integral part of the hand grip assembly are three switches 54, a trigger 56 which works through an L-shaped level to push a Linear Rheostat or an LVDT 192, and a palm grip 58 which works through depressing a limit switch 194. The switches 54 allow the operator to select software driver programmed modes of operation such as position, velocity, or force control, perform scaling between the hand grip motion and motion of the simulation, provide selection between one or more virtual reality force fields and/or selectively activate or deactivate particular joints of the hand controller.

The trigger grip provides a continuous change in

resistive value as a function of depression or displacement, and can thus be used to actuate an end effector or other continuously controlled virtual mechanism.

5 The palm grip can be sensed as either pressed or not pressed, indicating whether the user has a firm grip of the handle assembly or not. Normally the software driver uses this switch to control hand controller safety functions -- if it is not firmly pressed all active power
10 to the hand controller actuators is interrupted. However, the switch can be sensed and decoded in the software driver as well.

 All six axes of motion intersect at a point through the middle of the handle as previously discussed.
15 This point is chosen to be the most comfortable pivot point for operation. other embodiments of the invention can use alternative switches or small handle mounted finger actuated controls and may be configured with fewer than six axes or with axes which do not intersect at a single point.

20 The preferred embodiment of the present invention, uses a computer mediated control system and software driver an arbitrary mapping of position, velocity, acceleration, and force at the remote end (or within the virtual environment) can be presented to the operator (at
25 the handle of the apparatus), and the position, velocity, acceleration, and force sensed at the handle or the apparatus can be arbitrarily mapped to an object within a remote or virtual environment). In the preferred embodiment the computer mediation is performed by a single
30 computer and software driver, however, in other embodiments

multiple computers can be used to enhance performance. In some embodiments the forces presented to a user can be generated through the sensing of actual forces from a remote device, through computation by an external model or simulation process, or through local computation with the apparatus control computer. This includes the functionality for presenting virtual force field objects and software programmed limits and stops to the user.

The preferred embodiment uses multiple back-drivable geared frameless brushless DC motors with rotational sensing to effect and control the superposition of translational displacement with force application and angular displacement with torque, thus providing arbitrary, programmed application of forces, torques, and displacements to the handle in any direction. Position sensing per axis is effected by using optical encoders. Velocity and acceleration estimates are made digitally from the sequence of positional measurements in the software driver. Force is set through current drive commands to the brushless DC motor drivers. These drivers set motor current using a pulse width modulation method and commutate motor phases using Hall effect switched circuits. Other embodiments may use alternative electrical actuators, translational or rotational transmissions, and/or alternative displacement/rotation measurement sensing methods.

The electronics module functionality is documented through description of Figure 13. The module includes a computer 200 such as an IBM PC-AT or similar connected to a data bus 202. The computer implements a

closed loop control system for the motors based upon the rotary position of each DC motor which can be sensed by a position encoder for each motor which can be mounted on each motor housing. The encoder output is made available to the computer controller through six encoder decoding channels 204. The computer synthesizes velocity and acceleration from periodic position readings. Each servo loop cycle computes new motor torque values derived from actually drive voltages for the PWM amplifiers 206. These programmed torque values are interfaced to the PWM amplifiers through six digital to analog interfaces 208.

A set of three Hall effect switches are provided for each motor. In alternative embodiments, brushless motor commutation can be accomplished using encoder position readings, however this makes mounting the encoder more difficult. A simpler approach is to use Hall effect switches which signal each phase change point. The PWM amplifiers in this input for commutation, or sinusoidal signals which could be generated from resolvers..

The computer itself requires a device (typically a magnetic storage device such as a floppy disk or a hard disk) from which to load the servo control code. In other embodiments this software driver code can be located in Read-Only Memory or Optical Memory. The computer may also require a monitor and a keyboard to display status and input command sequences.

Because a digitally controlled servo system such as that used here can be dangerous on power up when many circuits are in unknown states or when the software crashes, a safety deadman's circuit 210 has been included

in the design. This circuit locks out all power to the amplifiers and motors unless a valid initialization sequence has been performed and the software servo loop is running correctly. It also shuts down power if the servo loop fails.

Because unknown conditions can arise either from the handle itself or from other external devices with safe shutdown subsystems, the deadman's circuit also can power down the manipulator on an externally signaled failure or if the operator releases his grip on the handle allowing the deadman's switch to be released.

The deadman's circuit works as follows. When the hand controller is powered up, the deadman circuit will be inactive until a valid servo control system is in operation, either -started by manual application start up or through the use of an automatic start-up command sequence initiated on computer interface system upon power-up.

When an active servo is established, a "Heart Beat" signal comprising an 37 Hz square wave (or faster) signal from analog to digital/digital to analog converter set 212 (ADC-DAC-1), is generated by the interrupt servo loop. This signal is required for power to be applied to the power amplifiers and therefore the motors. If a hardware or software "crash" occurs the "Heart Beat" will normally stop, cutting power to the power amplifiers and releasing actuation to the handle within 1/60th of a second.

The palm switch 56 must be depressed to power the motors under normal conditions. However, this switch can

be overridden by setting the ADC-DAC-2 output to logical zero; this line is normally at logical one 25 after servo loop initialization. An external "conditional panic" switch can be connected which can also be overridden under software control by wiring it in parallel to the Deadman's handle switch.

An unconditional panic switch can be wired by connecting a switch from the ADC-DAC 1 output to signal ground. This switch will stop the "Heart Beat" signal and simulate the occurrence of a software/hardware failure -- thus dropping power to the stick. The panic switch should be a push-type permanent contact type switch because power will return to the stick if the "panic" stop is removed.

The software driver functionality for the system is explained with reference to Figure 14. A servo shell process begins by initializing the interrupt loop data structures and linkages. After this is completed, the interrupt process runs every clock interval to provide the servo routines with a deterministic time base. In the PC-AT version of the software driver, this clock interrupt is a re-programmed use of the system clock/timer. other embodiments using alternative control computer architectures can use alternative timing signals/mechanisms.

The user initializes the desired time interval for his servo loop (shorter for crisper response -- longer to accommodate longer interrupt processing loops). The timer interrupt is skipped until enough ticks have been seen to represent this programmed interval. Then the interrupt level servo logic is executed.

If interrupt processing is skipped, control is immediately transferred to the system clock logic which either exits the interrupt or sends the execution flow into the operating system clock processing code (if 1/60th of a second has passed since the last time the 30 system clock code was executed). This system clock logic keeps the computer time of day correct and is required in many systems for proper operations of the floppy disks.

If the interrupt routine determines that it is time to run the servo code, it first checks (in the overrun logic) to see if a previous call to the servo routines is still being processed (this is done via interlocking flags). If the last loop has not yet completed, i.e. there are too many commands or controls to executed in the user programmed interrupt call-back period, an overrun is signaled and the new interrupt is rejected until the old one is fully completed, also servo calculations compensate time normalization based on the overrun information -- in effect, when overrun occurs, it is as though the clock interval has been doubled in duration.

When the servo loop begins to run, it first collects each encoder value, computes estimates for velocity and acceleration, and then computes an optional set of translations, scales, and rotations on the XYZ data and the pitch, roll, yaw data. This global transform allows the entire servo function space to be rotated, shifted, or scaled to create different force field "views". This is analogous to changing the view port to a 3D model in model 3D graphics engines.

After preprocessing position data from the

encoders, the servo loop enters a set of processing routines which iterates down a list of installed control functions and commands. A control is eligible for execution if the coordinates to be sent to it are inside of its bounding box. When a control function executes it reads its own local memory which can contain values sent in by the non-interrupt loop, a set of 6 coordinates, velocities, and accelerations, either untransformed or transformed, and computes a set of six torque contributions. The only difference between a control and command is that a control is expected to generate a force contribution, whereas a command is simply executed. Also commands can be flagged to run either before or after the list of controls.

The force contributions to the various axes are appropriately scaled and applied to a running sum of contributions (which are summed across multiple control function calls). When the control/command function lists are completed, the resulting final set of forces (or torques) become the values set into the output digital to analog interfaces.

After starting the interrupt "loop", the foreground also establishes a loop. This loop consists of polling for input from the command serial port and output from the interrupt loop and processing these inputs and outputs if present. If serial input becomes available, it is read and decoded. For a typical master-slave protocol, the input will consist of slave positions or forces which are transformed from native slave coordinates to scaled master Cartesian coordinates and which are then used to

update gains, center locations, or forces in one or more interrupt level servo functions to create a force "feel". The output from the loop will typically be center locations or offsets which are transformed back to slave coordinates and transmitted out of the serial port. Polling of the stick buttons, triggers, panic buttons, power supply level will also normally be performed as well.

Because the user actually installs pointers to his own control and/or command code, complete flexibility is available from the servo structure. Several different virtual controls are described below.

Detents: Consider trying to implement a "feel" which is similar to a spring loaded ball bearing falling into a dimple. This class of "feel" is a detent. A two dimensional representation of a detent is shown in Figure 15a. Bounding box 220 has a center at coordinates (Xc, Yc) and is defined by

$$\begin{aligned} X_c - 01 &< X < X_c + 03 \\ Y_c - 02 &< Y < Y_c + 04. \end{aligned}$$

The detent computes and applies a force contribution, Fin/Fout, to the hand controller actuators only if the hand controller joint coordinates, X and Y, are within bounding box 220. If this is true, the force contribution is computed as a function of the distance, D, from the detent center, Xc, Yc. The distance is defined as:

$$D = \text{Square Root}((X-X_c)^2 + (Y-Y_c)^2) \quad [1]$$

For cases where D is larger than Rmax, the force contribution, Fin and Fout, are [0,0]. For cases where D

is less than R, Fout is zero and Fin is computed as a force directed toward the center, Xc, Yc, from the current joint coordinates, X,Y. This computation is as follows:

$$F_{in} = [X-X_c \ Y-Y_c] * (-k_{in} * D - \text{velocity} * d_{in} + K_{in}).$$

5 Where velocity is computed from successive D measurements (in turn, computed from successive joint coordinate values, X, and Y, through equation [1] above), kin is the inner radius, R, spring constant, din is the inner radius velocity damping factor, and Kin is the inner radius status
10 force term.

For cases where D is less than Rmax but greater than R, Fin is zero and Fout is computed as a force directed away from the center Xc, Yc, starting at the current joint coordinates, X,Y. This computation is as
15 follows:

$$F_{out} = [X-X_c \ Y-Y_c] * (-k_{out} * (R_{max}-D) - \text{velocity} * d_{out} + K_{out})$$

Where velocity is computed from successive D measurements (in turn, computed from successive joint coordinate values, X, and Y, through equation [1] above), kout is the outer
20 radius spring constant, dout is the outer radius velocity damping factor, and Kout is the outer radius static force term.

Figure 15b shows the basis for the force contribution computation as a lumped parameter mechanical
25 system composed of a damping cylinder with damping factor d, a spring with spring constant k, and a static force, K.

Note that higher dimensionality detents can also generate hyperplanes and hyperspheres by having fewer or

more axes enter into the basic distance computations.
"Inside out" or "half side" versions can be made by
changing gain signs or setting some gains to zero. This
formulation of the detent is a superset of the more
familiar PID controller.

Edges/Position Limits: Because enforcement of
software programmed limit stops is needed, and because
there are often quite a few of them (12 per axis is
typical), it is advantageous to reduce the computation of
the previous example into a more efficient and degenerate
form. This can be done by dropping out the appropriate
terms leaving:

force = $-k*(X-X_L)$; For an X Limit
force = $-k*(Y-Y_L)$; For a Y Limit
force = $-k*(Z-Z_L)$; For a Z Limit

where X_L , Y_L , and Z_L are limit stop locations.

Velocity Limits: The same idea can also generate
a form which provides velocity damping only (or velocity
limits if a non-linearity is introduced):

force = $-velocity*d$;

where d is the damping factor and velocity is computed from
the difference between successive joint position
measurements.

Power Management Considerations: In a force-
reflecting device, it is desirable to have a device which
is as "massless" as possible, so that the operator feels a
force without any mass being associated with it. One
technique to achieve more strength or power is to use
gearing for leverage, but this approach is only effective
to a certain extent because the more of that leverage you

add, the less the device is capable of back drivability. In other words, the added strength results in more inertia by way of the drive stage in the motor, which is then amplified by the gear transmission. Another approach is to use high strength-to-weight actuators, which is best achieved by driving the motor at its peak performance. If this is done for an extended period of time, however, the motor will burn out. One solution is to cool down the motor, but the addition of a fan and related hardware adds power and expense not suited to lower-priced products. Whereas the various components may simply be oversized in an industrial robotics type application, adding mass in consumer- type environments may result is a large penalty.

It turns out in force reflecting applications that the maximum application of force is required that often nor necessary for prolonged periods. To a certain degree, such peak performance is only required when first touching the representation of an object, at which point it is common practice to "back off" from it anyway. To improve performance yet manage power, the system may take advantage of the fact that most motors have two ratings. One is a nominal consumption-type rating associated with average current during operation. This rating is also a direct function of the degree of heat dissipated by the motor in a steady-state sense; that is, how much heat the motor windings can endure before they start melting. Most motors also have a peak rating, however, which is much higher, often twice as high as the nominal. This value is related to how much power the unit can handle in an instantaneous sense, despite the amount of heat generated.

To at least momentarily operate in this peak torque mode, the average power requirements are monitored and integrated with respect to time in a background mode. In the event that this integral of power over time exceeds the average, the control system cuts back the peak power. Thus, according to one aspect of the invention, the system is capable of operating in peak mode, but with a "correction factor" in the event that the average power envelope over a predetermined time period has been exceeded. For example, this integral may be averaged over the last two seconds, more or less, depending upon the circumstance.

Transforms: The controller creates alternative transformed coordinates using homogeneous coordinate transformations. Transforming controls computation into a new coordinate frame also requires transformation of the partial force contributions back into the frame of the hand controller (so that they can be applied as joint forces and torques). This is done as shown in Figure 16 (shown for three axes only).

As a way to place a detent at a new X,Y,Z offset and a new orientation P,R,Y we can transform stick coordinates as follows before detent evaluation:

$$X' = S*[W] X + [X_o] \text{ and } O' = [0] + [O_o],$$

where W is a rotation matrix, X_o is a translation vector, S is a scale factor, and O_o is a pitch, roll, yaw offset. When detents are computed in this new coordinate system the resulting forces and torques, FX' , FY' , FZ' , must be reverse transformed into native coordinates prior to application. To translate the forces they are decomposed

into their components in the original hand controller X, Y, and Z coordinate system and summed. This can be done by applying the transform W to three unit vectors, $ax = [1,0,0]$, $ay = [0,1,0]$, $az = [0,0,1]$, oriented along the hand controller coordinates, X, Y, and Z unit vector to get their forms, ax' , ay' , az' , in the transform space:

$$ax' = [W] ax, ay' = [W] ay, az' = [W]$$

Then force components can be computed in native hand controller space, FX, FY, FZ, by adding the dot products with ax' , ay' , and az' as follows:

$$FX = FX' \cdot ax' + FY' \cdot ax' + FZ' \cdot ax'$$

$$FY = FX' \cdot ay' + FY' \cdot ay' + FZ' \cdot ay'$$

$$FZ = FX' \cdot az' + FY' \cdot az' + FZ' \cdot az'$$

To translate the torque we follow a similar procedure using a_{YG} , a_{RG} , and a_{PG} , and TY, TR, and TP.

While the best mode for carrying out the invention has been described in detail, those familiar with the art to which this invention relates will recognize various alternative designs and embodiments for practicing the invention as defined by the following claims.

1. A method for providing tactile force
feedback in response to a user position and orientation,
the method comprising the steps of:

storing data representative of a computer model,
including one or more objects having surfaces;

generating an electrical signal for each of a
plurality of degrees of freedom of the user as a function
of the user position and orientation;

synthesizing user velocity and acceleration from
the electrical signals to determine user-applied force;

mapping the user position, orientation and
applied force with respect to computer model to determine
interactions between the user and any objects included in
the model;

generating at least one force field in response
to the interactions;

generating a force signal for each degree of
freedom as a function of the force field; and

directing a tactile force on the user for each
force signal, the generated tactile forces providing the
tactile feedback.

2. The method of claim 1 wherein the number of
degrees of freedom is two or more.

3. The method of claim 2 wherein the step of
generating the electrical signals includes the step of
sensing position and orientation of the user's hand and
wherein the tactile forces are directed to the user's hand.

4. The method of claim 1, wherein the step of synthesizing user velocity and acceleration from the electrical signals to determine user-applied force includes the step of sampling the electrical signals at regular intervals to synthesize estimates of user velocity and acceleration.

5. The method of claim 1, further including the step of computing a torque contribution associated with each degree of freedom based upon user position, orientation and applied force to assist in determining the interaction between the user and any objects of the model.

6. The method of claim 5, further including the step of applying the torque contributions to a running sum of such contributions.

7. The method of claim 1, further including the step of generating an altered force field view by performing a mathematical transformation on the position and orientation data.

8. A system for providing tactile force feedback in response to a user position and orientation, the system comprising:

a multi-axis interface device including an actuator for each axis and a member movable by the user, the interface device being responsive to the position and orientation of the member to generate electrical signals representative of the position and orientation of the

member; and

10 a programmed computer operative to:
 store data representative of a computer
12 model, including any objects associated therewith,
 analyze the position and orientation of the
14 member relative to the objects to determine any interaction
 therebetween,
16 generate at least one force field in
 response to the interaction, and
18 generate a force signal for each axis of the
 device as a function of the force field, wherein the
20 actuators are responsive to their respective force signals
 to provide a force to each axis of the device for creating
22 the force feedback.

2 9. The system of claim 8 wherein the computer
 model is associated with computer-aided design.

2 10. The system of claim 8 wherein the member
 includes a handle gripable by the user.

2 11. The system of claim 8 wherein the virtual
 reality force field includes limits and stops implemented
 by the computer program.

2 12. The system of claim 11, including a force
 limit based upon velocity.

2 13. The system of claim 11, including a power
 limit based upon the integral of average power consumption

with respect to time.

14. The system of claim 8 wherein the means for
generating is capable of generating a plurality of force
fields, and wherein the member includes a switch means for
selecting one of the force fields.

15. A locally self-contained system for
providing tactile feedback in response to a user position
and orientation, comprising:

(a) a multi-axis, user-moveable member including
an actuator and position sensor dedicated to each axis;

(b) an interface device in communication with
each actuator and each position sensor, the interface
device being operative to:

generate an electrical signal representative of
the position and orientation of the member, and

activate one or more of the actuators in response
to a received force signal;

(c) a programmed computer in communication with
the interface device, the computer being programmed to
perform the following functions:

receive an electrical signal from the
interface device representative of the position and
orientation of the member with respect to time,

determine a user-applied force to the member
by synthesizing velocity and acceleration from the periodic
position readings,

generate at least one virtual reality force
field in response to the user-applied force,

24 generate a force signal as a function of the
force field, and
26 output the force signal to the interface
device.

16. The locally self-contained system of claim
2 15, wherein the actuator and position sensor associated
with a particular axis are in physical communication with
4 one another, enabling the superposition of translational
displacement with force application, and angular
6 displacement with torque, thereby permitting an arbitrary,
programmed application of forces, torques and displacements
8 to the member in any direction.

17. The method of balancing the power
2 consumption of a manipulator having a peak torque mode and
an average power rating in a tactile-feedback environment,
4 comprising the steps of:

operating the manipulator primarily in the peak
6 torque mode;

at least periodically integrating the average
8 power consumed by the manipulator as a function of time;
and

10 backing off from the peak torque mode, at least
momentarily, in the event the average power rating of the
12 manipulator has been exceeded.

18. The method of claim 17, including the step
2 of continuously integrating the average power consumed by
the manipulator as a function of time.

Abstract of the Disclosure

A system and method for providing a tactile virtual reality to a user is present. The position and orientation of the user is utilized to generate a virtual reality force field. Forces are in turn generated on the user as a function of this force field. A six-axis manipulator is presented for providing a user interface to such a system. This manipulator provides a unique kinematic structure with two constant force springs which provide gravity compensation so that the manipulator effectively floats.

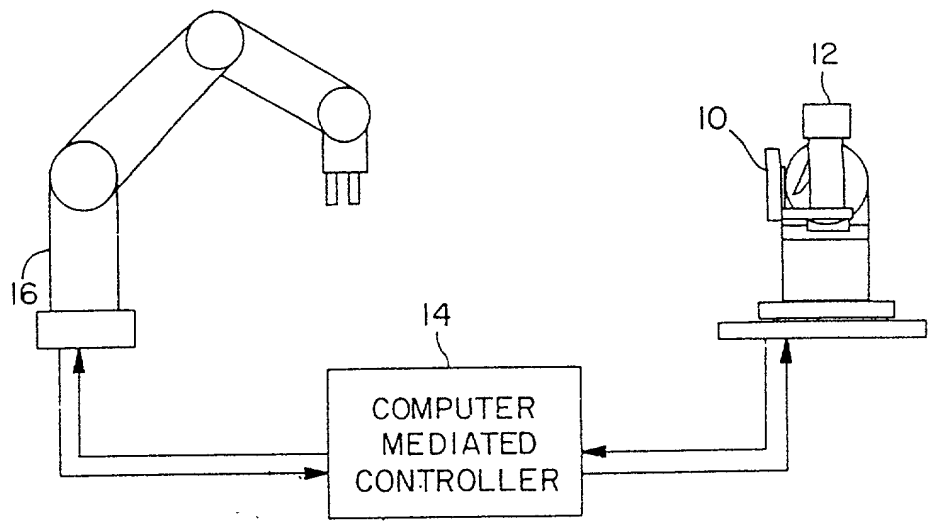


FIG. 1
(PRIOR ART)

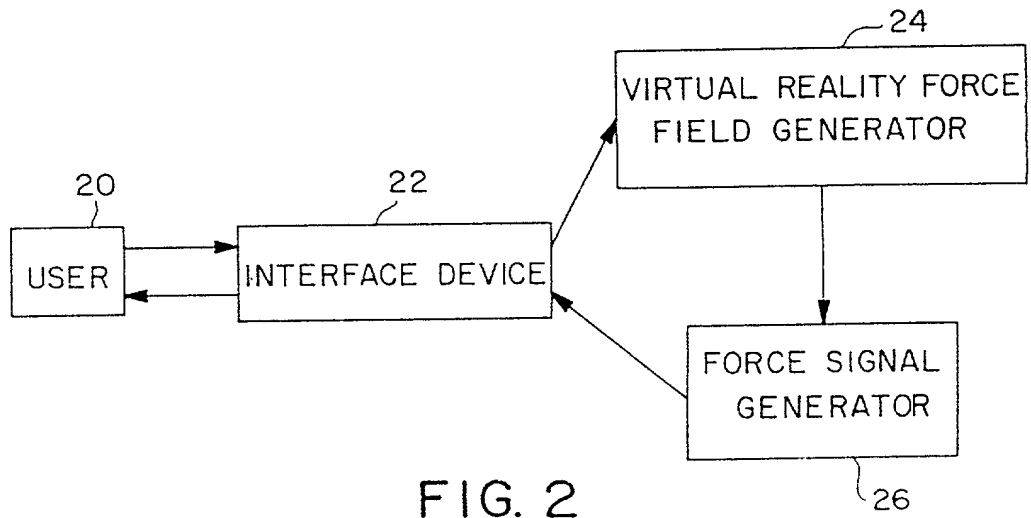


FIG. 2

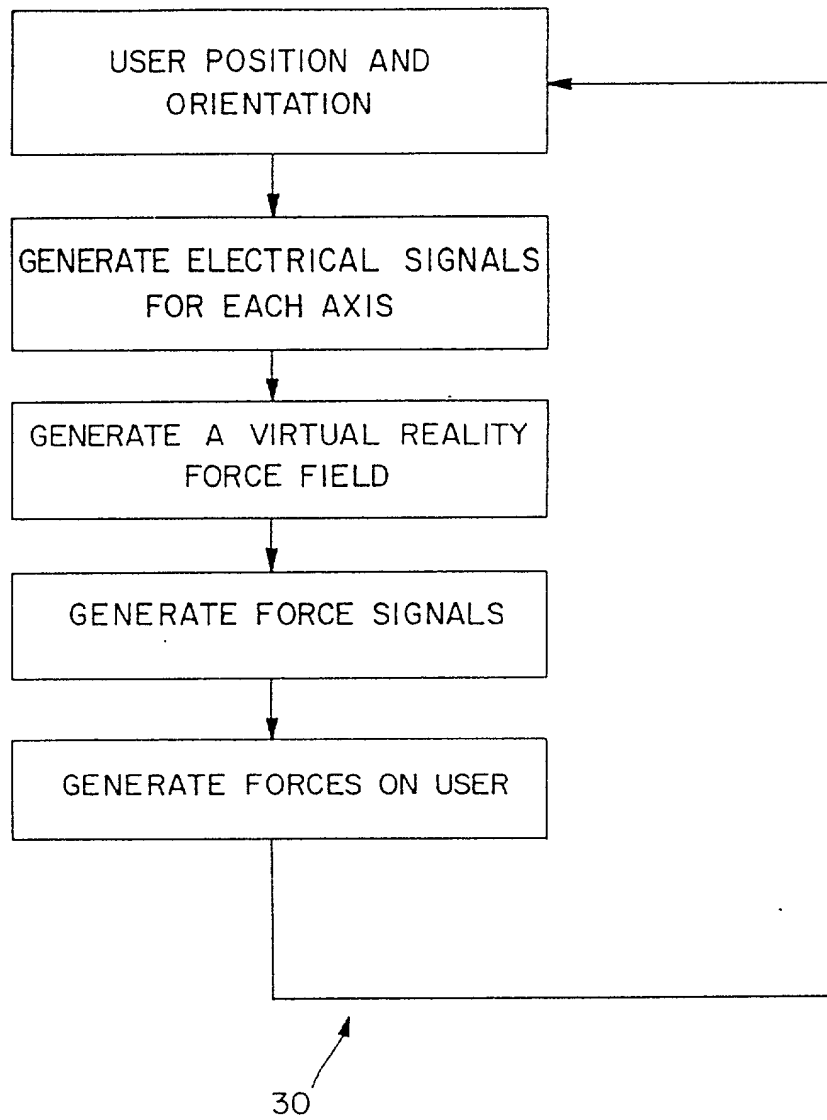


FIG. 3

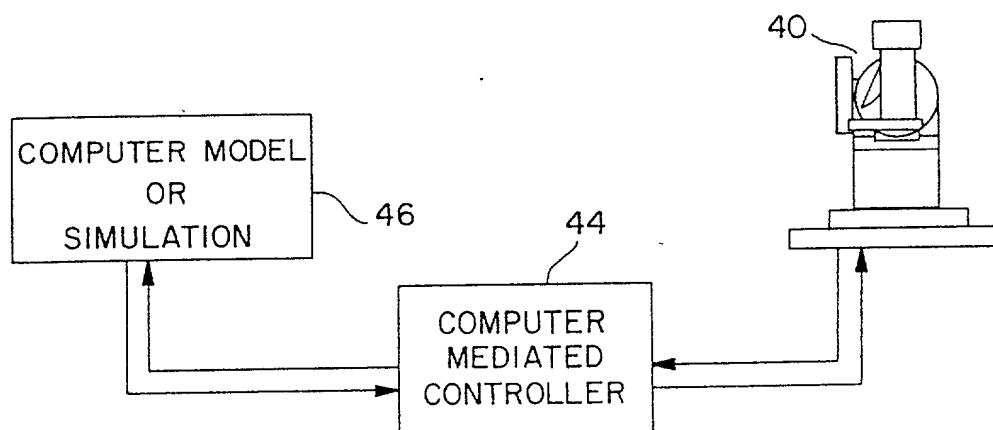


FIG. 4

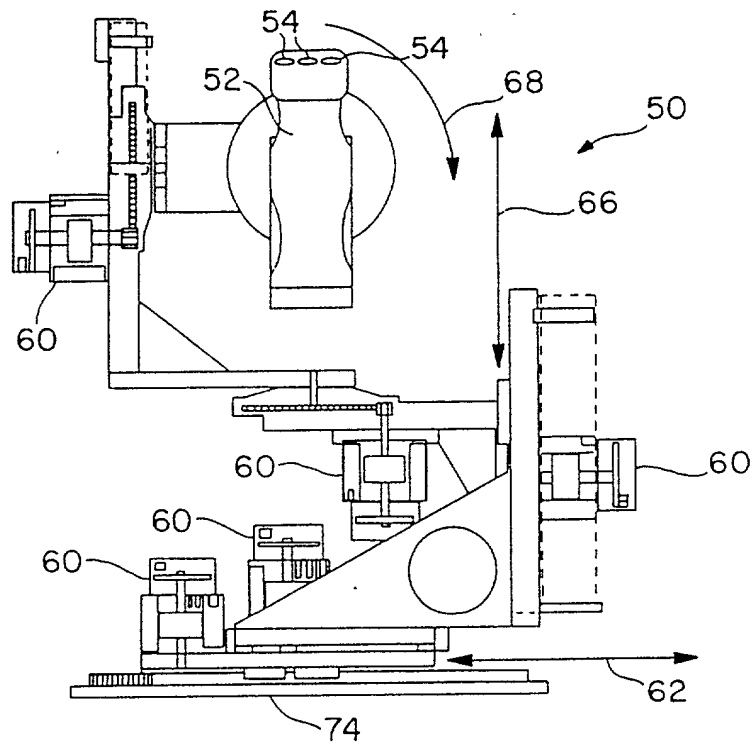


FIG. 5a

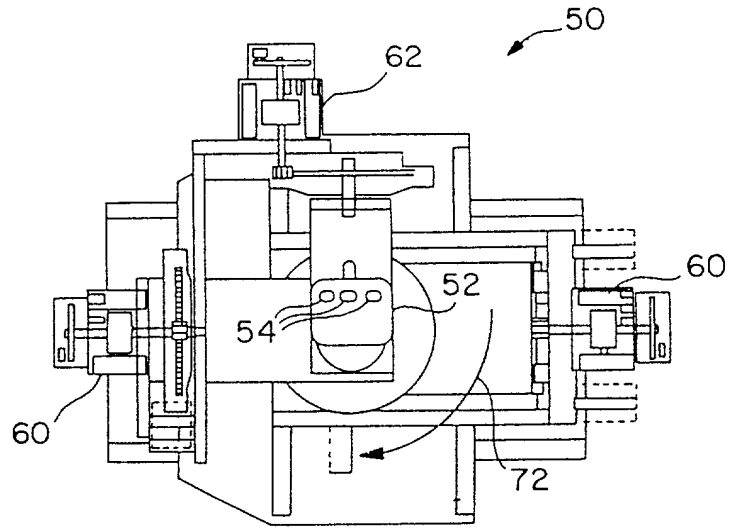


FIG. 5b

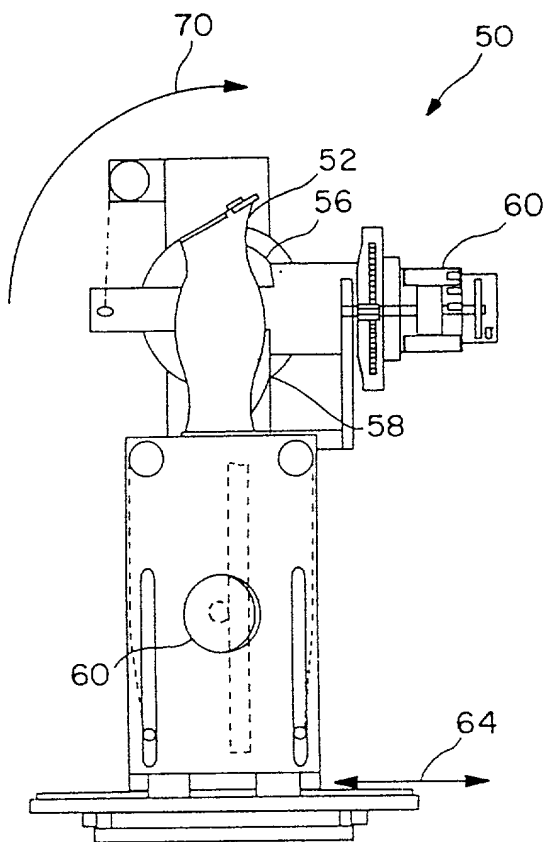


FIG. 5c

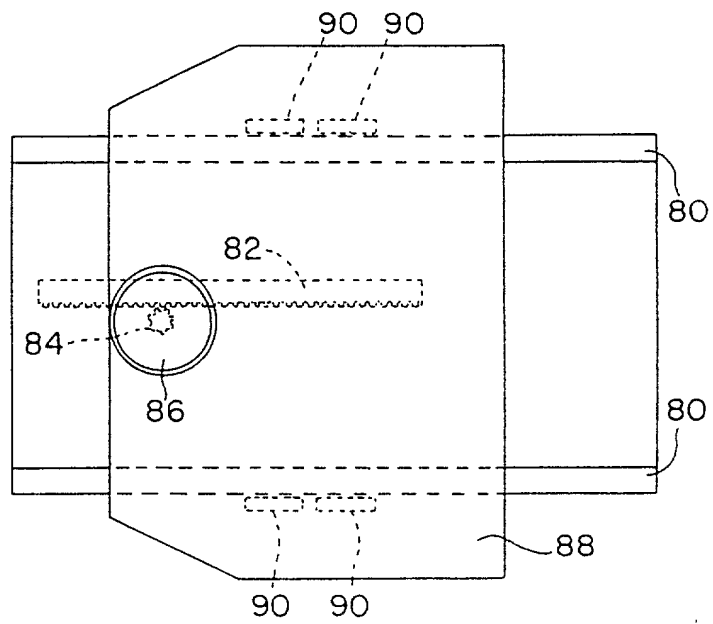


FIG. 6a

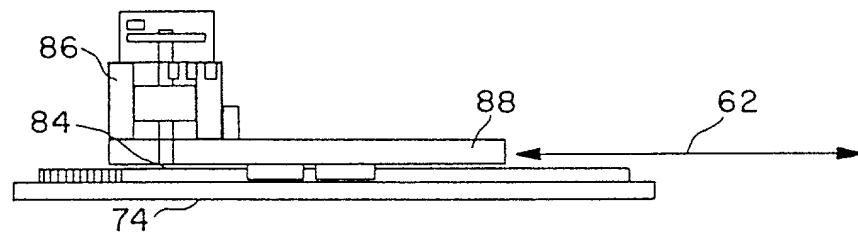


FIG. 6b

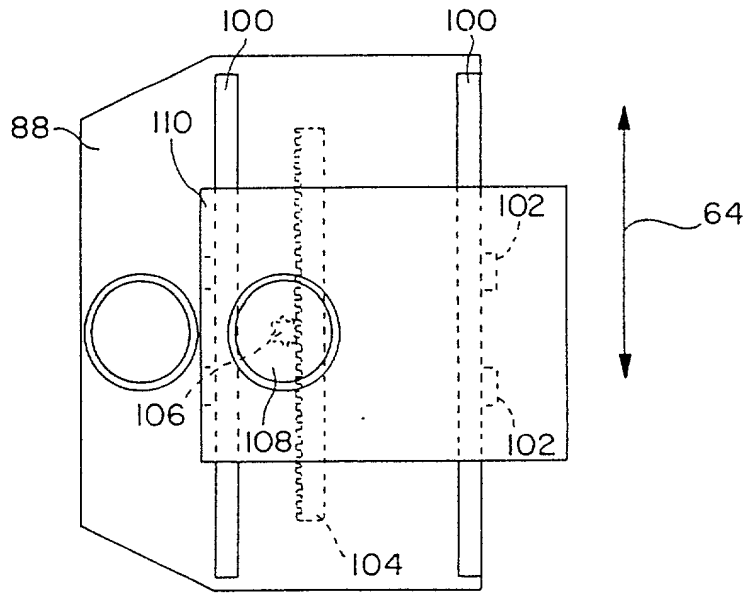


FIG. 7a

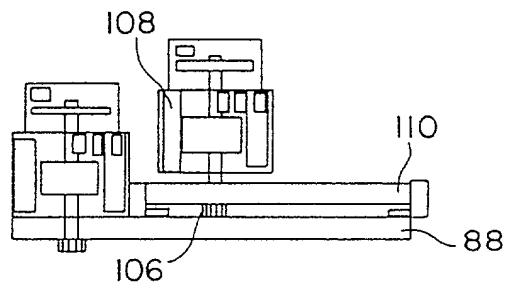


FIG. 7b

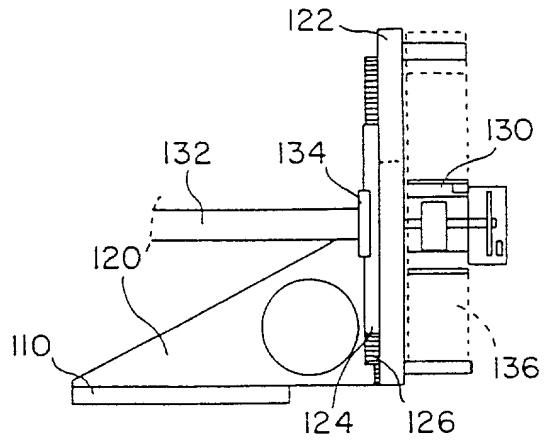


FIG. 8a

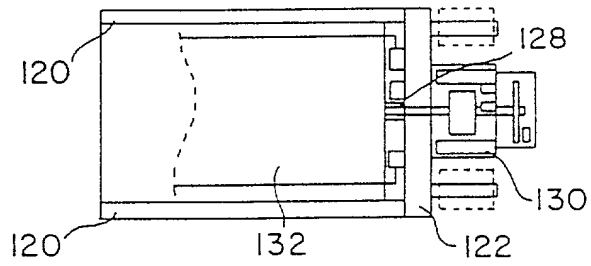


FIG. 8b

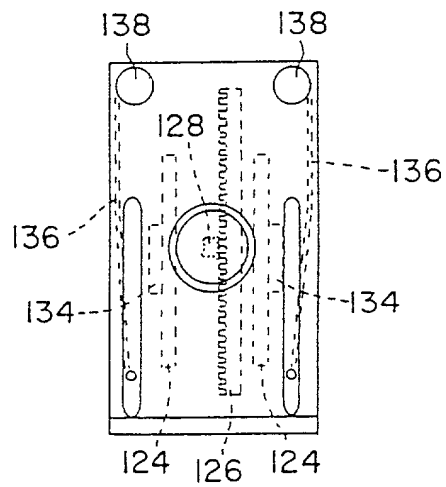


FIG. 8c

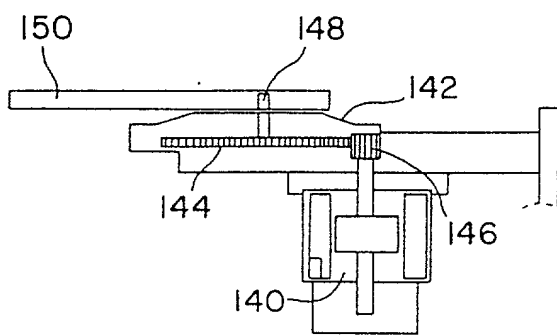


FIG. 9a

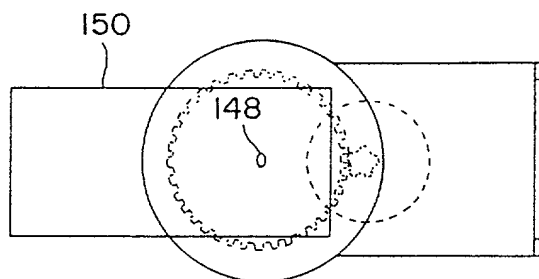


FIG. 9b

FIG. 1 is a cross-sectional view of a first embodiment of a device. The device includes a base 150, a vertical support 160, and a horizontal member 170. A vertical rod 162 is positioned within the support, with a spring 166 and a stop 168. A dashed line 172 indicates a specific feature or boundary.

FIG. 10b

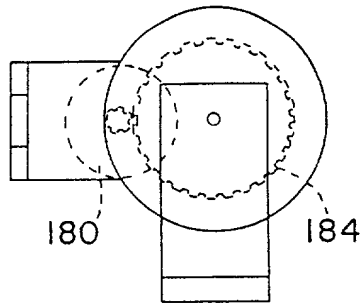


FIG. 11a

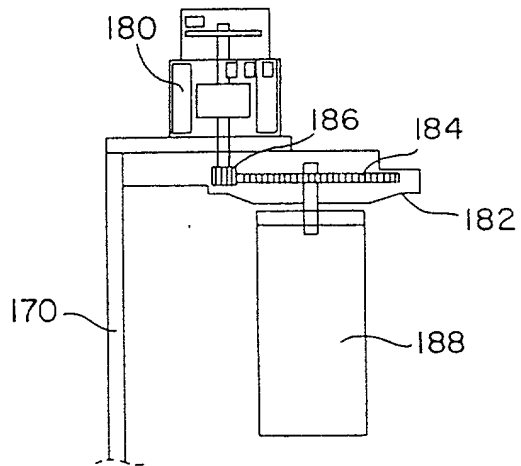


FIG. 11b




FIG. 12a

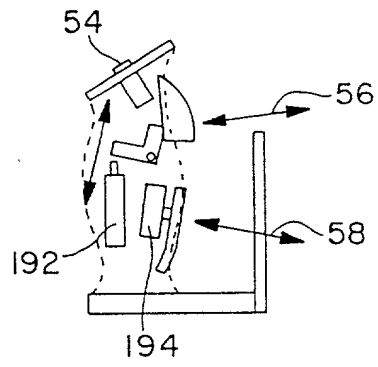


FIG. 12b

FIG. 13

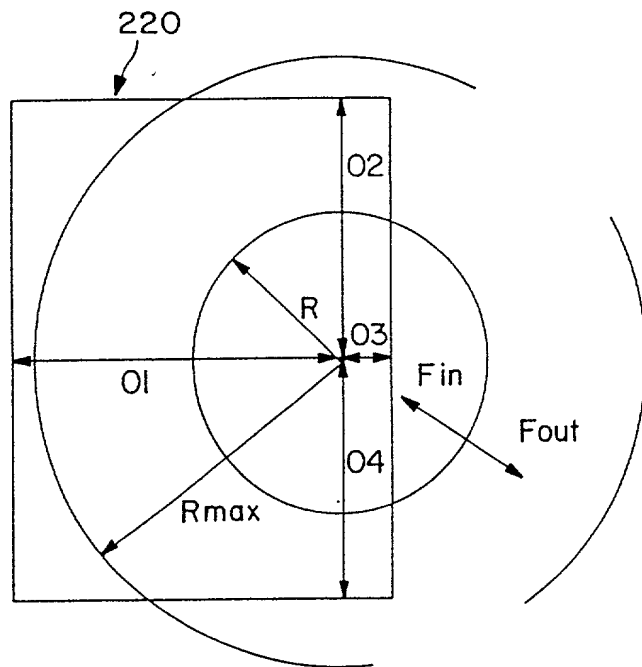


FIG. 15a

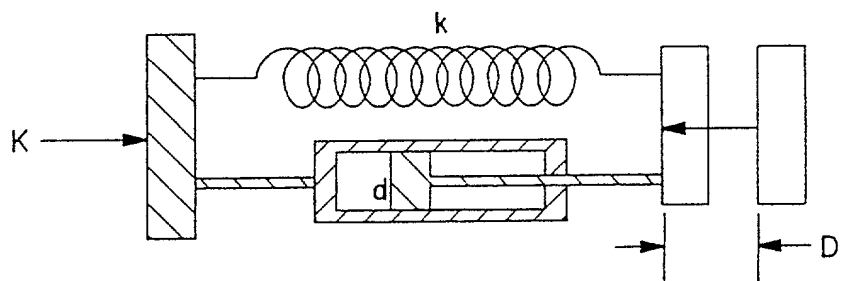


FIG. 15b

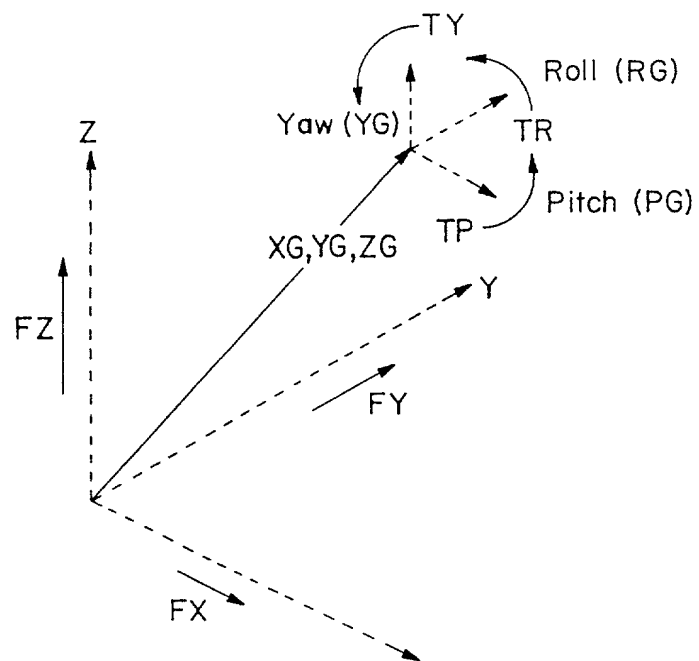


FIG. 16

COPY

Attorney's Docket No CYB-00603/03

COMBINED DECLARATION AND POWER OF ATTORNEY

(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL, DIVISIONAL,
CONTINUATION OR CIP)

As the below named inventor, I hereby declare that

TYPE OF DECLARATION

This declaration is the following type:

- ☐ original
- ☐ design
- ☐ supplemental

NOTE: If the declaration is for an International Application being filed as a divisional, continuation or continuation-in-part do not check next item; check appropriate one of last three items

- ☐ national stage of PCT

NOTE: If one of the following 3 items apply then complete and also attach ADDED PAGES FOR
DIVISIONAL, CONTINUATION OR CIP

- ☐ divisional
- ☐ continuation
- ☒ continuation-in-part (CIP)

INVENTORSHIP IDENTIFICATION

WARNING: If the inventors are each not the inventors of all the claims an explanation of the facts, including the ownership of all the claims at the time the last claimed invention was made, should be submitted.

My resident, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

FORCE FEEDBACK SYSTEM

SPECIFICATION IDENTIFICATION

the specification of which: (complete (a), (b) or (c))

- (a) ☒ is attached hereto.

- (b) ☐ was filed on _____ as ☐ Serial No. 0 _____ or ☐ Express Mail No., as Serial No. not yet known _____ and was amended on _____ (if applicable)

NOTE: Amendments filed after the original papers are deposited with the PTO which contain new matter are not accorded a filing date by being referred to in the declaration. Accordingly, the amendments involved are those filed with the application papers or, in the case of a supplemental declaration, are those amendments claiming matter not encompassed in the original statement of invention or claims. See 37 CFR 1.6

- (c) ☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____ (if any)

ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge to the duty to disclose information

- ☒ which is material to patentability as defined in 37, Code of Federal Regulations, § 1.56

(also check the following items, if desired)

- ☐ and which is material to the examination of this application, namely, information where there is a substantial likelihood that a reasonable examiner would consider it important in deciding whether to allow the application to issue as a patent, and

- ☐ In compliance with this duty there is attached an information disclosure statement in accordance with 37 CFR 1.98.

PRIORITY CLAIM (35 U.S.C. § 119)

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

(complete (d) or (e))

- (d) ☒ no such applications have been filed.
- (e) ☐ such applications have been filed as follows

NOTE: Where item (e) is entered above and the International Application which designated the U.S. itself claimed priority check item (c), enter the details below and make the priority claim

A. PRIOR FOREIGN/PCT APPLICATION(S) FILED WITHIN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS APPLICATION AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119

Country (or indicate if PCT)	Application Number	Date of Filing (day, month, year)	Priority Claimed Under 37 USC 119
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

NOTE: If the application filed more than 12 months from the filing date of this application is a PCT filing forming the basis for this application entering the United States as (1) the national stage, or (2) a continuation, divisional, or continuation-in-part, then also complete ADDED PAGES TO COMBINED DECLARATION AND POWER OF ATTORNEY FOR DIVISIONAL, CONTINUATION OR CIP APPLICATION for benefit of the prior U.S. or PCT application(s) under 35 U.S.C. § 120

POWER OF ATTORNEY

I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Ernest I. Gifford (Reg. No. 20,644)
Allen M. Krass (Reg. No. 18,277)
Irvin L. Groh (Reg. No. 17,505)
Douglas W. Sprinkle (Reg. No. 27,394)
Alfred L. Patmore, Jr. (Reg. No. 19,145)
Douglas J. McEvoy (Reg. No. 34,385)

Thomas E. Anderson (Reg. No. 31,318)
Ronald W. Citkowski (Reg. No. 34,732)
Judith M. Riley (Reg. No. 30,311)
Theresa A. Orr (Reg. No. 34,890)
Ellen Cogen Lipton (Reg. No. 38,109)
John G. Posa (Reg. No. 37,424)

SEND CORRESPONDENCE TO:

John G. Posa
GIFFORD, KRASS, GROH, SPRINKLE,
PATMORE, ANDERSON & CITKOWSKI, P.C.
280 N. Woodward Ave.
Suite 400
Birmingham, MI 48009

DIRECT TELEPHONE CALLS TO:

John G. Posa
(313) 913-9300

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon

SIGNATURE(S)

Full name of sole or first inventor CHARLES J. JACOBUS

Inventor's signature [Signature]

Date 16 Oct 1995 Country of Citizenship US

Residence Ann Arbor, Michigan

Post Office Address 820 Heatherway 437 RIVERVIEW
Ann Arbor, Michigan 48104

Full name of second joint inventor ALAN J. RIGGS

Inventor's signature [Signature]

Date 16 Oct 1995 Country of Citizenship US

Residence Ann Arbor, Michigan

Post Office Address 2865 Burlington
Ann Arbor, Michigan 48105

CHECK PROPER BOX(ES) FOR ANY OF THE FOLLOWING ADDED PAGE(S)
WHICH FORM A PART OF THIS DECLARATION

- ☒ Signature for third and subsequent joint inventors. Number of pages added 1

* * *

- ☐ Signature by administrator(trix), executor(trix) or legal representative for deceased or incapacitated inventor.
Number of pages added _____

* * *

- ☐ Signature for inventor who refuses to sign or cannot be reached by person authorized under 37 CFR 1.47.
Number of pages added _____

* * *

- ☒ Added pages to combined declaration and power of attorney for divisional, continuation, or continuation-in-part (CIP) application. Number of pages added 1

* * *

- ☐ Authorization of attorney(s) to accept and follow instructions from representative.

* * *

If no further pages form a part of this Declaration then end this Declaration with this page and check the following item

- ☐ This declaration ends with this page.

ADDED PAGE TO COMBINED DECLARATION AND POWER OF ATTORNEY
FOR SIGNATURE BY THIRD AND SUBSEQUENT INVENTORS

Full name of third joint inventor MARK J. TAYLOR

Inventor's signature *Mark J. Taylor*

Date Oct. 16, 1995 Country of Citizenship US

Residence Ann Arbor, Michigan

Post Office Address ~~5107 Church~~ 306 Mulholland

Ann Arbor, Michigan ~~48105~~ 48103

Full name of fourth joint inventor, if any

Inventor's signature _____

Date _____ Country of Citizenship _____

Residence _____

Post Office Address _____

Full name of fifth joint inventor, if any

Inventor's signature _____

Date _____ Country of Citizenship _____

Residence _____

Post Office Address _____

004760-5048E360

ADDED PAGE TO COMBINED DECLARATION AND POWER OF ATTORNEY
FOR DIVISIONAL, CONTINUATION OR CIP APPLICATION

(complete this part only if this is a divisional continuation or CIP application)

CLAIM FOR BENEFIT OF EARLIER U.S./PCT APPLICATION(S) UNDER 35 U.S.C. 120

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 412 I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application.

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 USC 120:					
U.S. APPLICATIONS			Status (Check one)		
U.S. APPLICATIONS	U.S. FILING DATE		Patented	Pending	Abandoned
1. 08/257,070	June 9, 1994			XX	
2. 07/984,324	December 2, 1992		XX		
3. PCT APPLICATIONS DESIGNATING THE U.S.					
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NOS. ASSIGNED (if any)			
4.					
5.					
6.					